

抽丝剥茧之 - MySQL 疑难杂症排查

叶金荣 - 知数课堂培训联合创始人、MySQL专家

2016.10.28

网站打开怎么那么慢啊
有个活动页面打不开啦

技术同学们赶紧看下嘛！！！




别急，先确认问题


- 全网用户打开都慢还是个别线路问题？
- 每次页面打开都慢还是客户端偶发现象？
- 整个页面打开都慢还是个别元素导致？
- 所有页面打开都慢还是只有动态页面慢？
- 页面打不开有什么提示代码吗，是404还是其他




问题追踪

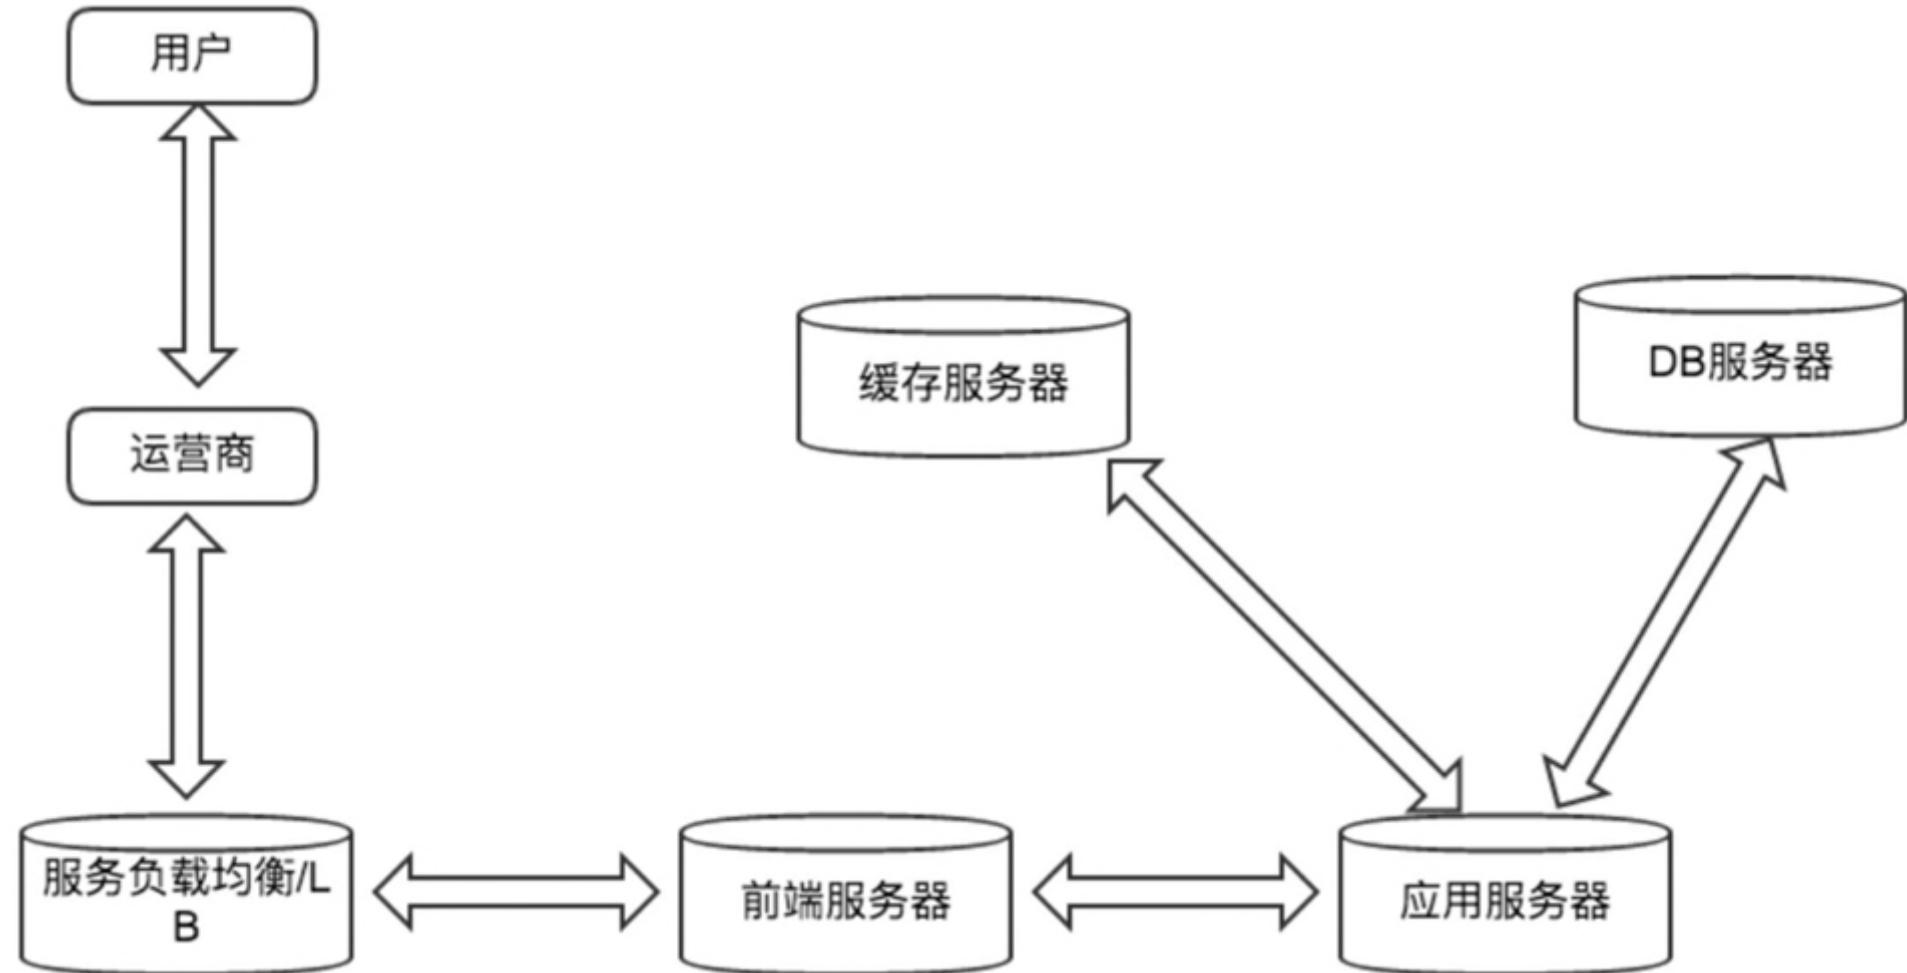

问题追踪

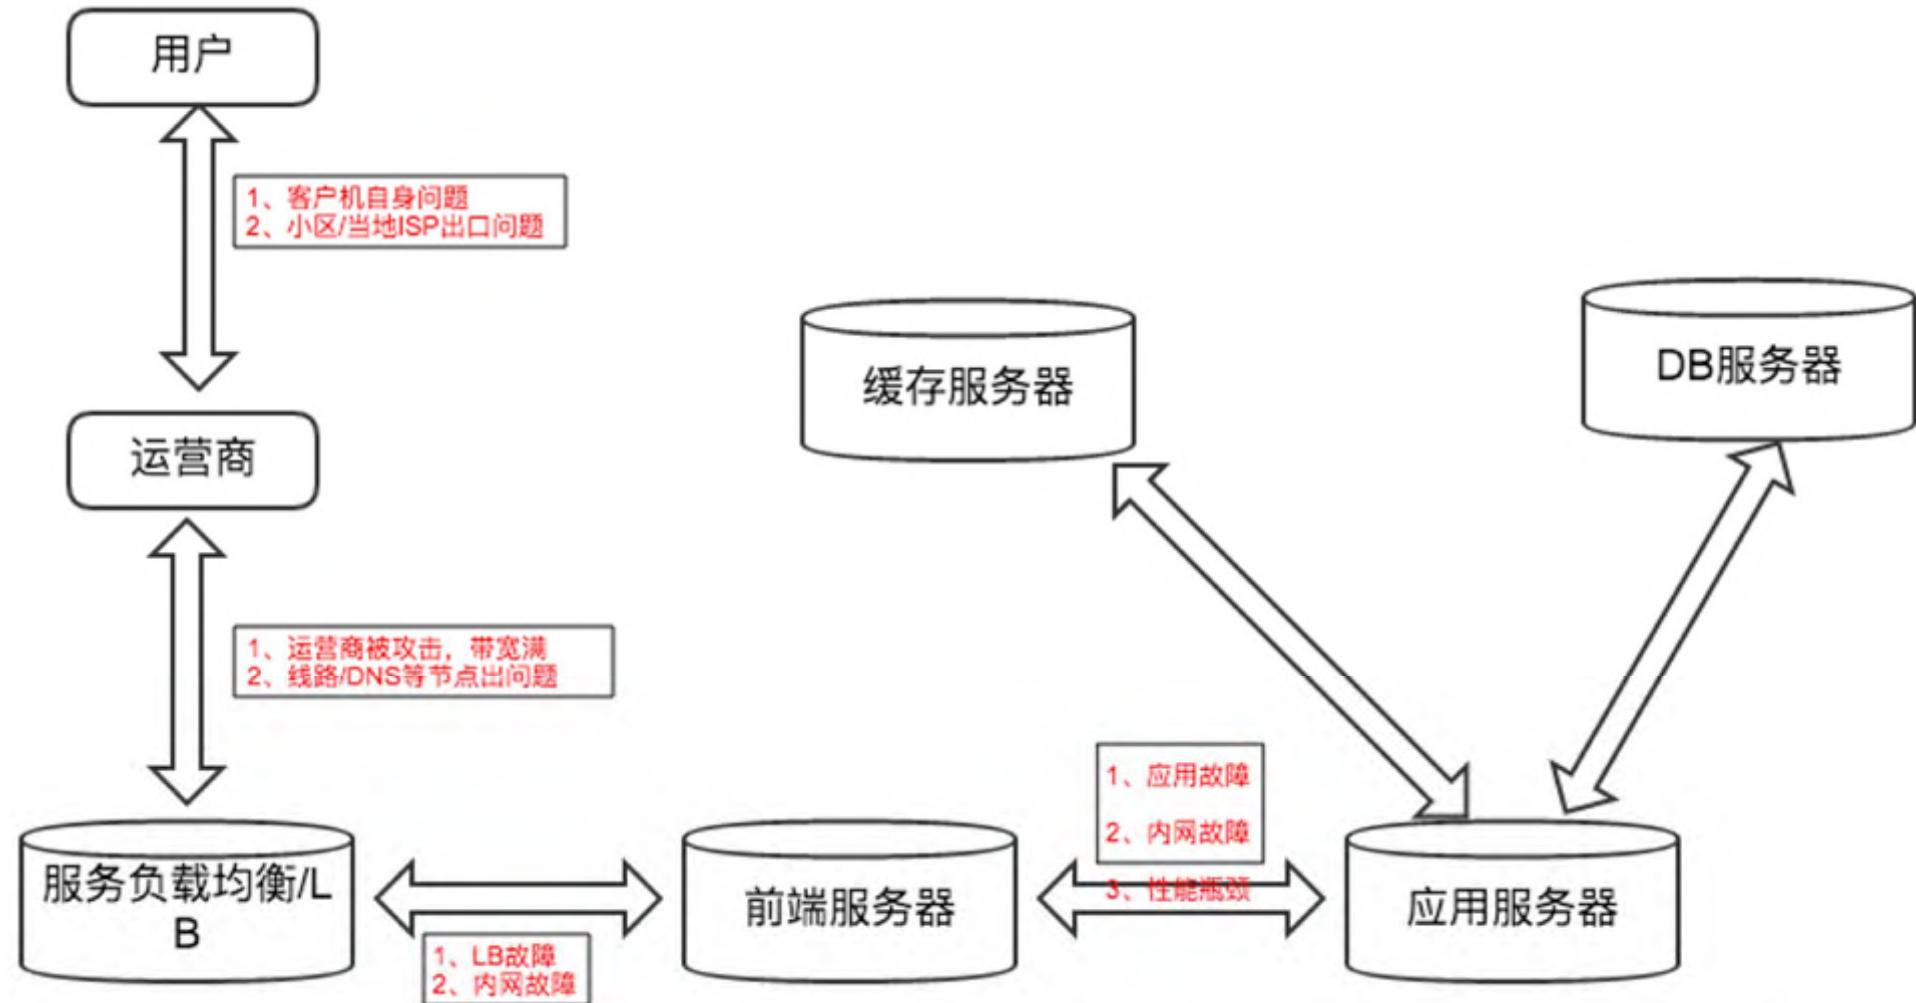

常见瓶颈

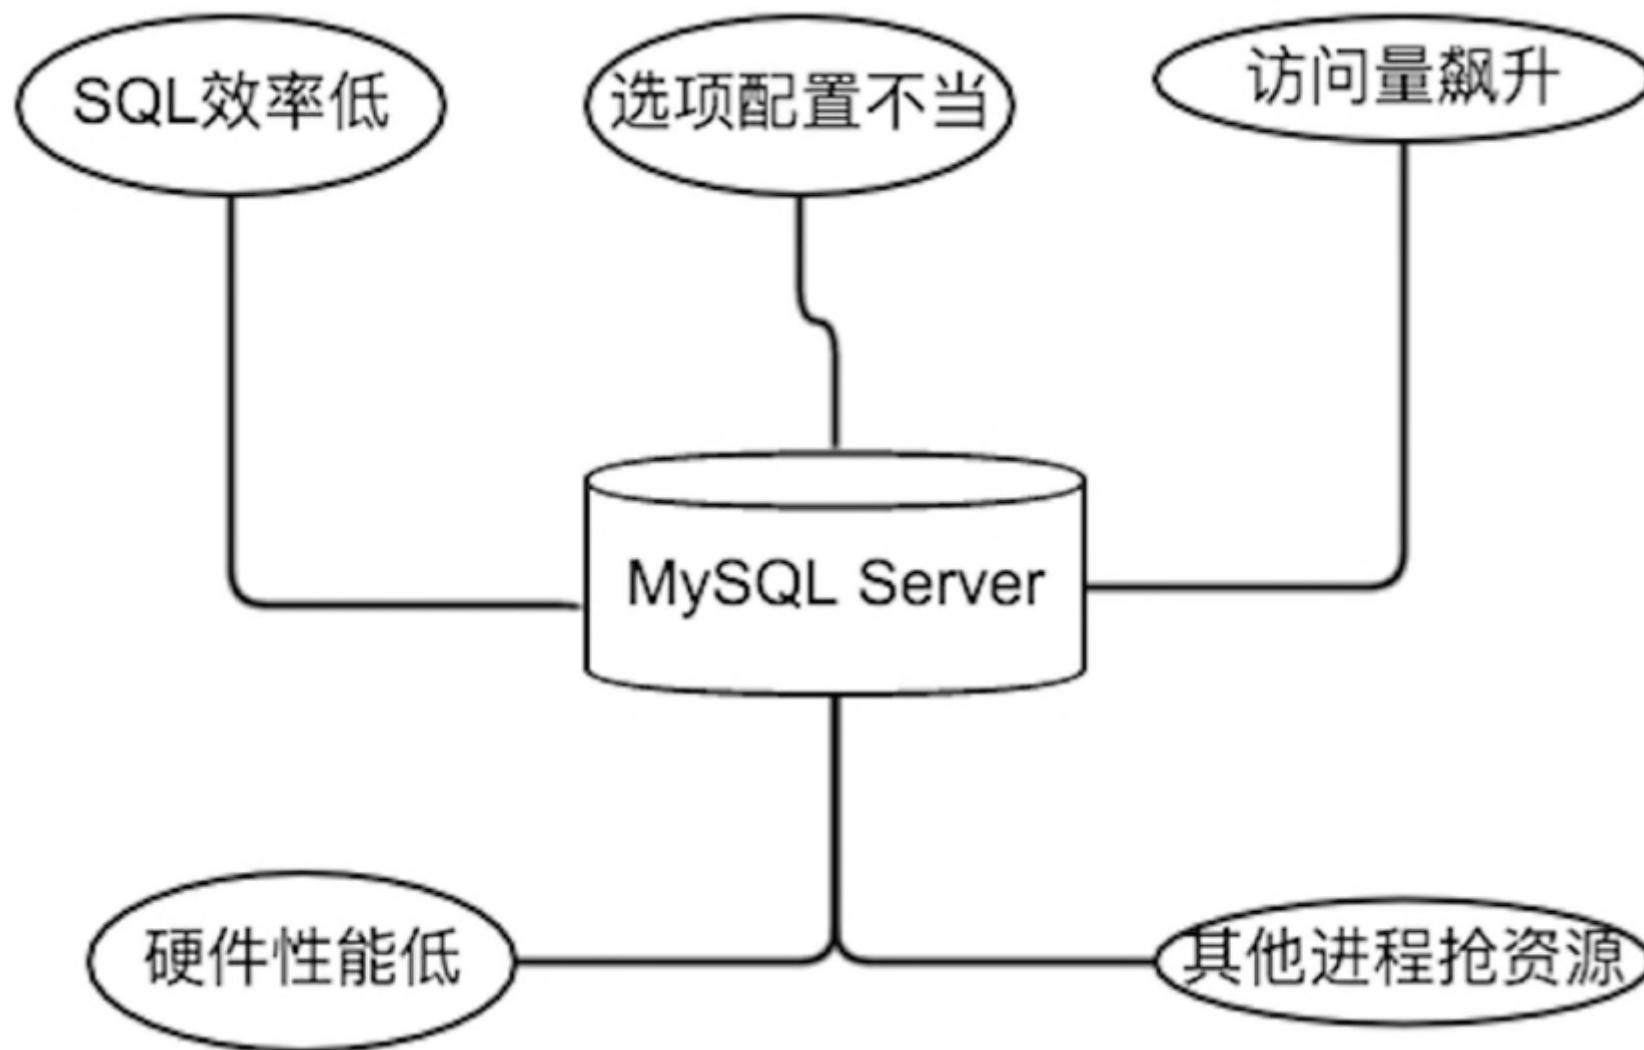

确认是MySQL存在瓶颈

- top/free/vmstat/sar/mpstat确认
 - 确认mysqld进程的CPU消耗占比
 - 确认mysqld进程的CPU消耗是%user，还是%sys高
 - 确认是否物理内存不够用了
 - 确认是否有swap产生
 - 确认CPU上是否有大量中断（或中断不均）



确认是MySQL存在瓶颈

- top

```
top - 23:52:22 up 44 days, 13:18, 2 users, load average: 16.36, 11.54, 1.11
Tasks: 726 total, 1 running, 724 sleeping, 1 stopped, 0 zombie
%Cpu(s): 62.7 us, 5.6 sy, 0.0 ni, 27.8 id, 3.0 wa, 0.0 hi, 1.0 si, 0.0 st
KiB Mem : 98719944 total, 335312 free, 85283712 used, 13100916 buff/cache
KiB Swap: 20971516 total, 20908900 free, 62616 used. 12792824 avail Mem

          PID USER      PR  NI    VIRT    RES    SHR S %CPU %MEM     TIME+ COMMAND
185880 mysql     20   0 15.784g 2.273g  7496 S 784.1  2.4    2:15.56 mysqld
      568 root      20   0        0      0      0 S  1.0  0.0    1:48.35 kswapd1
193905 mysql     20   0 80.413g 0.076t 12772 S  1.0 82.8 227:08.13 mysqld
      567 root      20   0        0      0      0 S  0.7  0.0    2:58.29 kswapd0
19924 root      20   0 158224   2856   1536 R  0.7  0.0    0:00.13 top
```

— 哥很忙~



确认是MySQL存在瓶颈

- free

```
[root@imysql ~]# free -m
```

	total	used	free	shared	buff/cache	available
Mem:	96506	54265	452	79	417	417
Swap:	20479	21	20458			

– 嗯，看出来啥了没



确认是MySQL存在瓶颈

- vmstat -S m 1

procs			memory				swap		io		system			cpu			
r	b	swpd	free	buff	cache	si	so	bi	bo	in	cs	us	sy	id	wa	st	
42	0	80	338	0	13400	0	0	536	112400	34657	221678	43	6	50	1	0	
0	1	80	358	0	13379	0	0	372	71421	33717	227494	43	6	50	1	0	
0	1	80	352	0	13383	0	0	524	106847	28957	202112	35	6	58	1	0	
33	0	80	354	0	13385	0	0	540	73859	38159	259421	40	7	52	1	0	
0	1	80	347	0	13386	0	0	456	108401	65412	205543	33	6	60	1	0	
31	1	81	329	0	13409	0	0	448	76707	37723	240639	45	7	48	1	0	
27	0	81	344	0	13392	0	0	360	104701	40005	188579	34	6	59	1	0	
35	0	81	344	0	13395	0	0	360	78647	37873	222284	39	7	54	1	0	

– CPU和I/O的压力都不算小



确认是MySQL存在瓶颈

- sar -u 1

Linux 3.10.0-327.el7.x86_64 (imysql)		10/09/2016		_x86_64_ (32 CPU)			
11:57:57 PM	CPU	%user	%nice	%system	%iowait	%steal	%idle
11:57:58 PM	all	66.49	0.00	8.43	0.38	0.00	24.70
11:57:59 PM	all	72.19	0.00	9.26	0.16	0.00	18.39
11:58:00 PM	all	74.34	0.00	9.08	0.09	0.00	16.49
11:58:01 PM	all	72.09	0.00	10.03	0.13	0.00	17.76
11:58:02 PM	all	67.52	0.00	12.30	0.13	0.00	20.06
11:58:03 PM	all	66.55	0.00	10.54	0.22	0.00	22.69
11:58:04 PM	all	72.03	0.00	9.70	0.09	0.00	18.17
11:58:05 PM	all	72.08	0.00	9.77	0.09	0.00	18.06
11:58:06 PM	all	72.20	0.00	9.87	0.09	0.00	17.83

– CPU好忙的样子



确认是MySQL存在瓶颈

- sar -d 1

Linux 3.10.0-327.el7.x86_64 (imysql)			10/10/2016		_x86_64_ (32 CPU)				
12:01:25 AM	DEV	tps	rd_sec/s	wr_sec/s	avgrq-sz	avgqu-sz	await	svctm	%util
12:01:26 AM	dev8-16	2990.00	0.00	267137.00	89.34	0.20	0.07	0.05	14.60
12:01:27 AM	dev8-16	2949.00	0.00	248692.00	84.33	0.18	0.06	0.05	15.00
12:01:28 AM	dev8-16	3043.00	0.00	333020.00	109.44	0.24	0.08	0.07	20.10
12:01:29 AM	dev8-16	3199.00	0.00	285494.00	89.24	0.18	0.06	0.04	13.20
12:01:30 AM	dev8-16	3207.00	0.00	329196.00	102.65	0.17	0.05	0.04	12.80
12:01:31 AM	dev8-16	3125.00	0.00	304370.00	97.40	0.23	0.07	0.05	16.10
12:01:32 AM	dev8-16	3062.00	0.00	232723.00	76.00	0.12	0.04	0.04	11.50
12:01:33 AM	dev8-16	3060.00	0.00	266480.00	87.08	0.15	0.05	0.04	12.50
12:01:34 AM	dev8-16	2913.00	0.00	261099.00	89.63	0.20	0.07	0.06	18.50
Average:	dev8-16	3069.59	0.00	280986.34	91.54	0.19	0.06	0.05	15.02

– I/O压力不小



确认是MySQL存在瓶颈

- mpstat -P ALL -I SUM 1 100

Average:	CPU	intr/s
Average: all	50272.00	
Average: 0	1815.00	
Average: 1	1698.00	
Average: 2	1704.33	
<hr/>		
Average: 27	5240.33	
Average: 29	1287.33	
Average: 30	1575.00	
Average: 31	1279.33	

– 中断不均衡



那就一个个解决吧



看现场： MySQL 在干嘛

- show [full] processlist
- locks & lock waits
 - I_S.innodb_trx
 - I_S.innodb_locks
 - I_S.innodb_lock_waits
 - sys.innodb_lock_waits
- show engine innodb status
 - log flush
 - checkpoint



查看MySQL线程状态

```
Id: 34499710
User: myapp
Host: imysql
db: mydb
Command: Query
Time: 110
State: Sending data
Info:
```



长时间的 Sending data

- 从引擎层读取数据返回给Server端的状态
- 长时间存在的原因
 - 没适当的索引，查询效率低
 - 读取大量数据，读取缓慢
 - 系统负载高，读取缓慢



长时间的 Sending data

- 怎么办
 - 加上合适的索引
 - 或者改写SQL， 提高效率
 - 增加LIMIT限制每次读取数据量
 - 检查&升级I/O设备性能



查看MySQL线程状态

```
Id: 34399716
User: myapp
Host: imysql
db: mydb
Command: Query
Time: 15132
State: Waiting for table metadata lock
Info:
```



长时间等待MDL锁

- 原因
 - DDL被阻塞，进而阻塞其他后续SQL
 - DDL之前的SQL长时间未结束



长时间等待MDL锁

- 怎么办
 - 提高每个SQL的效率
 - 干掉长时间运行的SQL
 - 把DDL放在半夜等低谷时段
 - 采用pt-osc执行DDL



查看MySQL线程状态

```
Id: 3249973
User: myapp
Host: imysql
db: mydb
Command: Sleep
Time: 3542
State:
Info:
```



长时间的Sleep

- 看似无害，实则可能是大害虫
 - 占用连接数
 - 消耗内存未释放
 - 可能有行锁（甚至是表锁）未释放



长时间的Sleep

- 怎么办
 - 适当调低timeout
 - 主动kill超时不活跃连接
 - 定期检查锁、锁等待
 - 可以利用pt-kill工具



还有哪些状态要关注的呢

- Copy to tmp table
 - 执行alter table修改表结构，需要生成临时表
 - 建议放在夜间低谷执行，或者用pt-osc



还有哪些状态要关注的呢

- Copying to tmp table [on disk]
- Creating tmp table
 - 常见于group by没有索引的情况
 - 需要拷贝数据到临时表[内存/磁盘上]
 - 执行计划中会出现Using temporary关键字
 - 建议创建合适的索引，消除临时表



还有哪些状态要关注的呢

- Creating sort index
 - 常见于order by没有索引的情况
 - 需要进行filesort排序
 - 执行计划中会出现Using filesort关键字
 - 建议创建排序索引



还有哪些状态要关注的呢

- Waiting for global read lock
- Waiting for query cache lock
- Waiting for table level lock
- Waiting for table metadata lock



还应该怎么关注

- slow query log

```
# Thread_id: 44 Schema: test Last_errno: 0 Killed: 0
# Query_time: 1.841461 Lock_time: 0.000051 Rows_sent: 1 Rows_examined:
13719413 Rows_affected: 0 Rows_read: 13719413
# Bytes_sent: 70 Tmp_tables: 0 Tmp_disk_tables: 0 Tmp_table_sizes: 0
# InnoDB_trx_id: 4A0B89B
# QC_Hit: No Full_scan: Yes Full_join: No Tmp_table: No Tmp_table_on_disk:
No
# Filesort: No Filesort_on_disk: No Merge_passes: 0
# InnoDB_IO_r_ops: 0 InnoDB_IO_r_bytes: 0 InnoDB_IO_r_wait: 0.000000
# InnoDB_rec_lock_wait: 0.000000 InnoDB_queue_wait: 0.000000
# InnoDB_pages_distinct: 12252
SET timestamp=1312970168;
select count(*) from t1_rnd;
```



还应该怎么关注

- innodb lock wait

```
(root@imysql)[information_schema]>select * from innodb_locks;
```

lock_id	lock trx_id	lock_mode	lock_type	lock_table	lock_index	lock_space	lock_page	lock_rec	lock_data
30251:149:173:20	30251	X	RECORD	`test`.`t1`	PRIMARY	149	173	20	49130
30250:149:173:20	30250	X	RECORD	`test`.`t1`	PRIMARY	149	173	20	49130

```
(root@imysql)[information_schema]>select * from innodb_lock_waits;
```

requesting_trx_id	requested_lock_id	blocking_trx_id	blocking_lock_id
30251	30251:149:173:20	30250	30250:149:173:20



```
(root@imysql)[sys]>select * from innodb_lock_waits\G
***** 1. row ****
    wait_started: 2016-09-27 12:57:27
        wait_age: 00:00:04
    wait_age_secs: 4
    locked_table: `test`.`t1`
    locked_index: PRIMARY
    locked_type: RECORD
    waiting_trx_id: 30282
    waiting trx started: 2016-09-27 12:57:27
        waiting_trx_age: 00:00:04
    waiting_trx_rows_locked: 1
    waiting_trx_rows_modified: 0
        waiting_pid: 32
        waiting_query: update t1 set c4 = 12345 where c1 >=10 and c1<=15
        waiting_lock_id: 30282:149:6:8
    waiting_lock_mode: X
        blocking_trx_id: 30281
            blocking_pid: 31
            blocking_query: NULL
            blocking_lock_id: 30281:149:6:8
            blocking_lock_mode: X
        blocking_trx_started: 2016-09-27 12:57:24
            blocking_trx_age: 00:00:07
    blocking_trx_rows_locked: 6
    blocking_trx_rows_modified: 5
        sql_kill_blocking_query: KILL QUERY 31
        sql_kill_blocking_connection: KILL 31
```

知数堂培训
http://zhishu

还应该怎么关注

- show engine innodb status

```
--TRANSACTION 30260, ACTIVE 16 sec
80 lock struct(s), heap size 24784, 32833 row lock(s), undo log entries 32755
MySQL thread id 22, OS thread handle 123145316356096, query id 195 localhost root cleaning up
TABLE LOCK table `test`.`t1` trx id 30260 lock mode IX
RECORD LOCKS space id 149 page no 6 n bits 496 index PRIMARY of table `test`.`t1` trx id 30260 lock_mode X locks rec but not gap
Record lock, heap no 8 PHYSICAL RECORD: n_fields 6; compact format; info bits 0
```



还有什么可以预防的

- 业务上线前， 提前消灭垃圾SQL
 - 在开发或压测环境中
 - 调低long_query_time的值， 甚至设为0
 - 开启log_queries_not_using_indexes
 - 分析slow query log， 并消除潜在隐患SQL



还有什么可以预防的

- 用更好的设备
 - CPU更快更多核
 - 内存更快更大
 - 用更快的I/O设备
 - 用更好的网络设备



还有什么可以预防的

- 让OS保持高效
 - 采用xfs/ext4文件系统
 - 采用noop/deadline io scheduler



回顾

- 根据业务架构，逐步排查问题所在
 - 熟练使用各种工具定位瓶颈根源
 - 根据各种不同情况应对解决
-
- 事实上，有经验的DBA，通常看到现场后就能很快判断出问题所在了



谢谢，希望有所帮助

Q & A