



百万并发下PHP协程+非阻塞框架设计实践

@代维

PHPCON
www.phpconchina.com



About me

- 2014年加入PHP官方PECL开发组
- Yac Windows版本作者
- Memcache、Redis等扩展PHP7版本贡献者
- 现就职于有赞



1. Why & What
2. 协程 in Zan
3. Zan框架设计



Part 1

Why & What




Why?!

- 连接数
- 并发
- 性能



What is Zan?

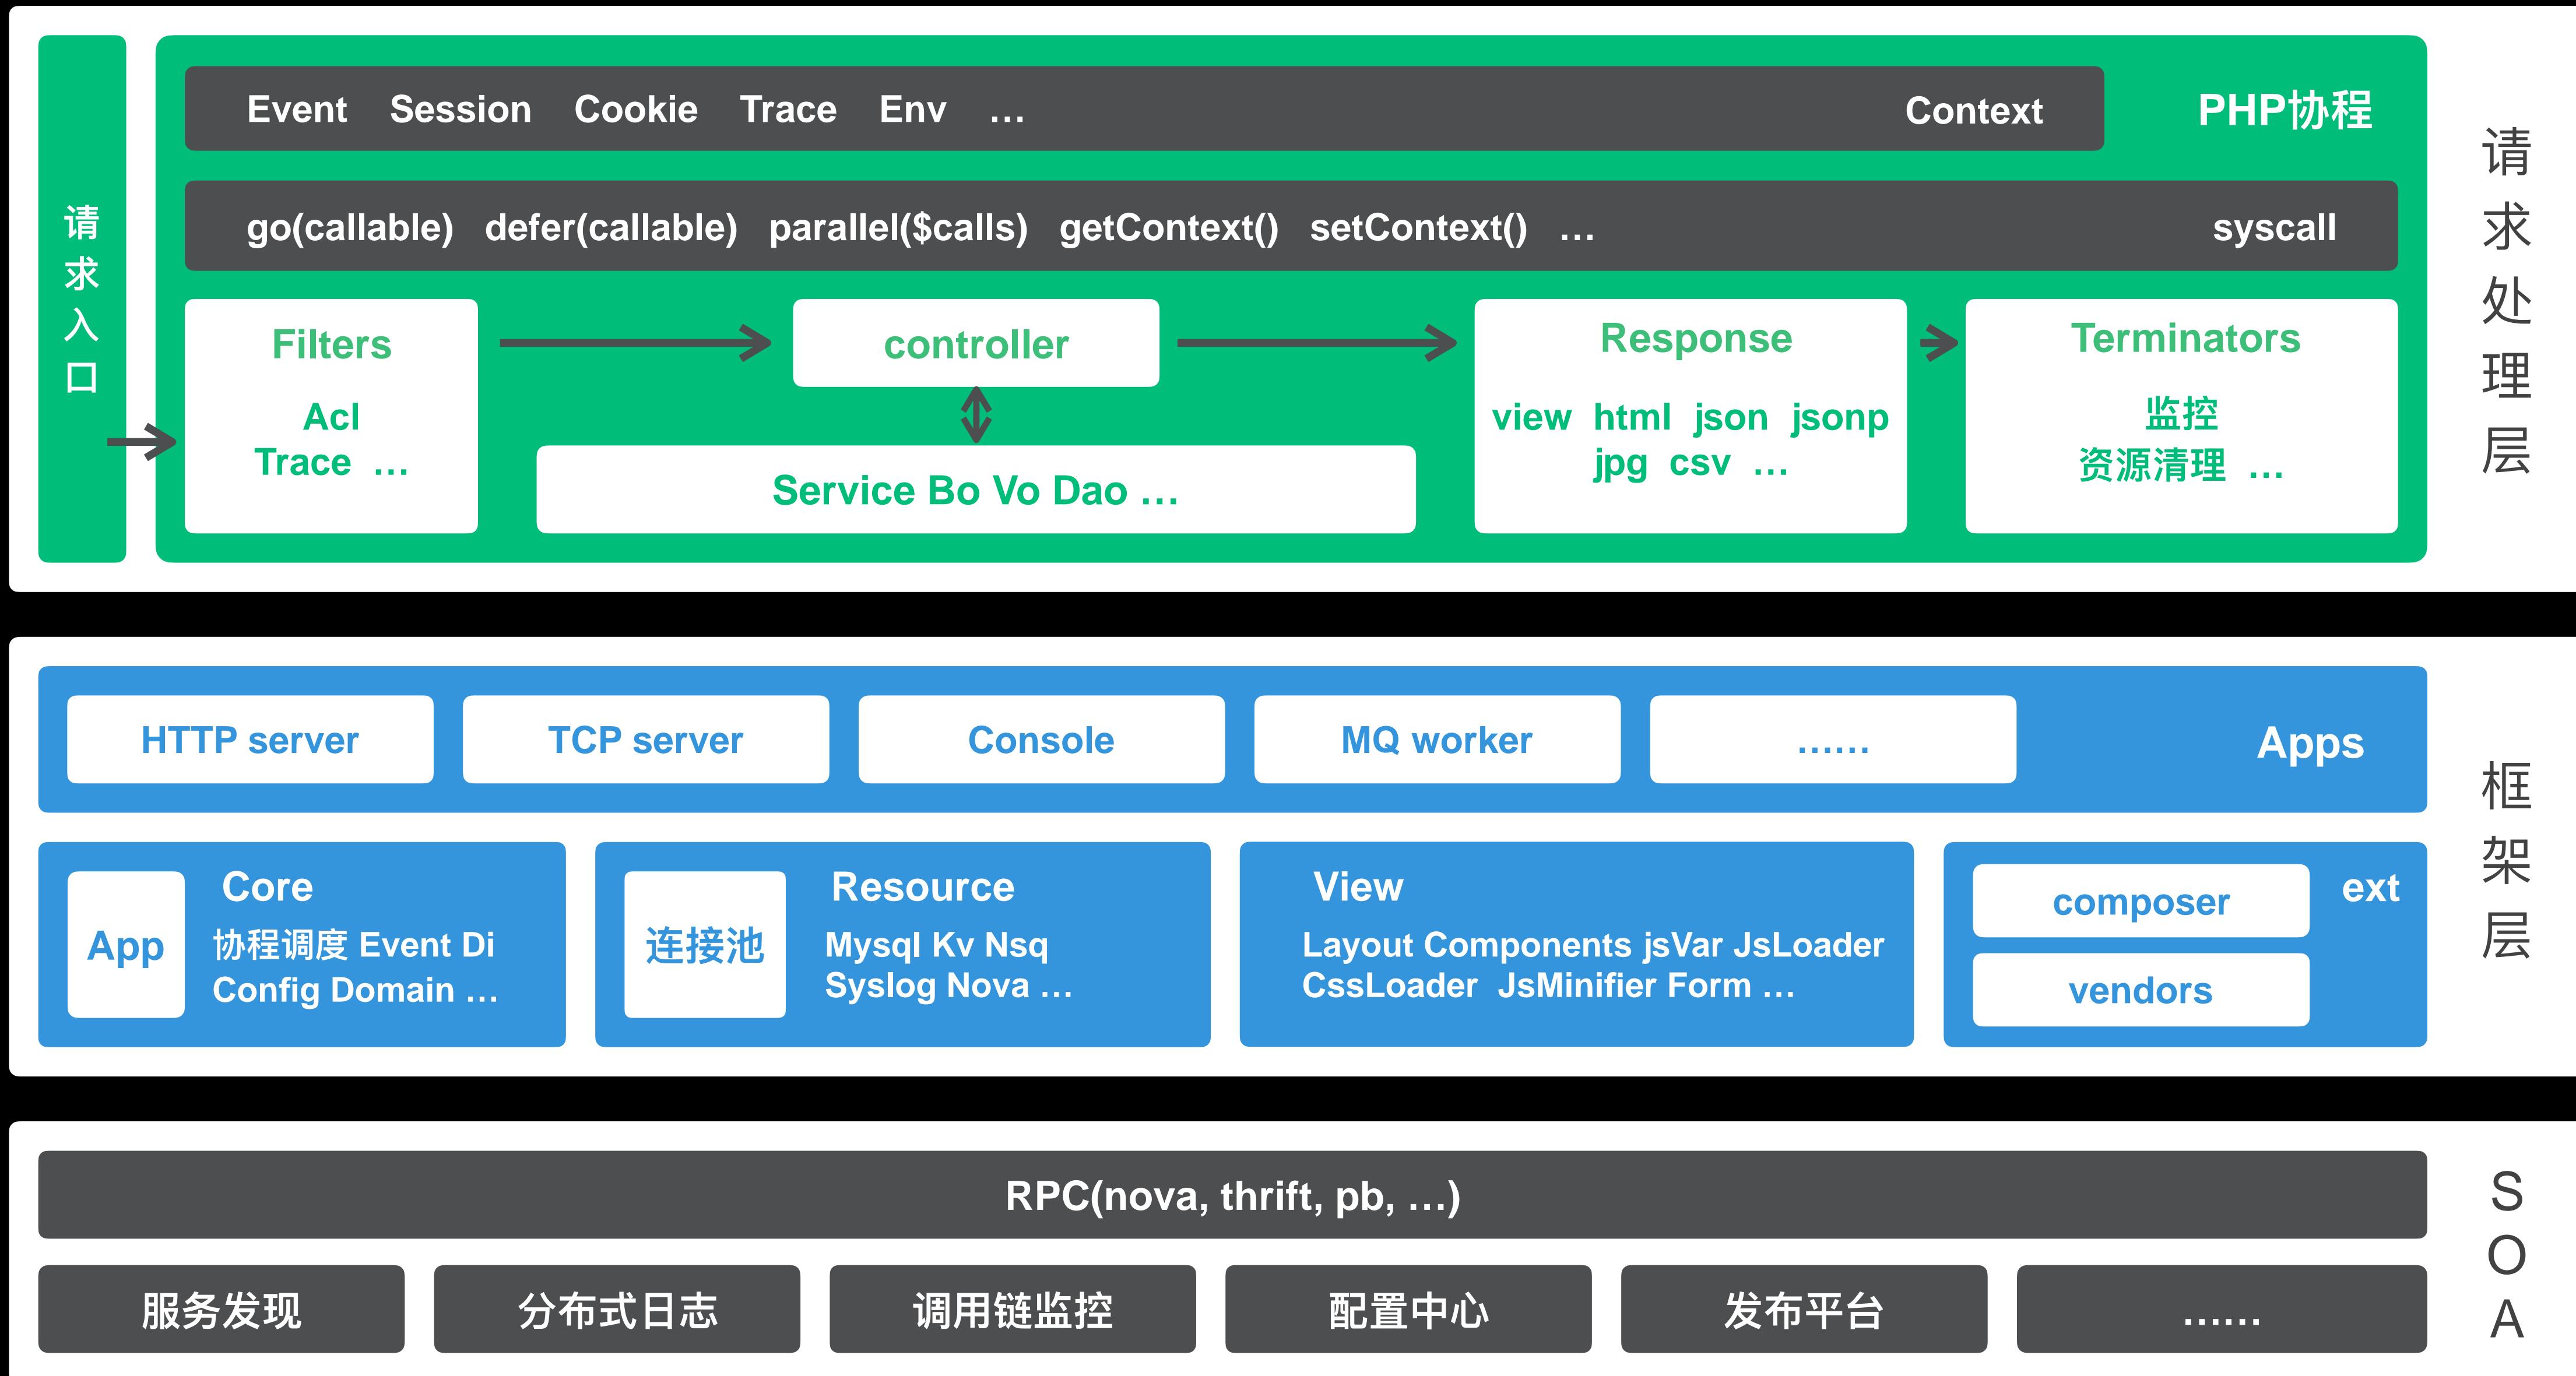



一分钟起步

1

```
# composer global require youzan/zan-installer
```

3

bin/httpd

2

zan

4


立即打开浏览器访问吧！

```
WWW zan

Create a new ZanPHP application.
Which type application would you create? (use <space> to select)
> * HTTP
  o TCP

Your application name: (ex: zanphp-demo) demo
Your application namespace: (ex: zanphp/zanhhttp) youzan/demo
Please input a output directory:
/data/www
Downloading the source code archive ...
Extracting archive ...
Congratulations, your application has been generated to the following directory.
/data/www/demo/
See /data/www/demo/README.md for information on how to run.
Composer installing...
Loading composer repositories with package information
Updating dependencies (including require-dev)
- Installing zanphp/zan (dev-master b6d8d44)
  Cloning b6d8d443a7a3545a3d1796b39e54fcbe2d276a10

Writing lock file
Generating autoload files
WWW |
```

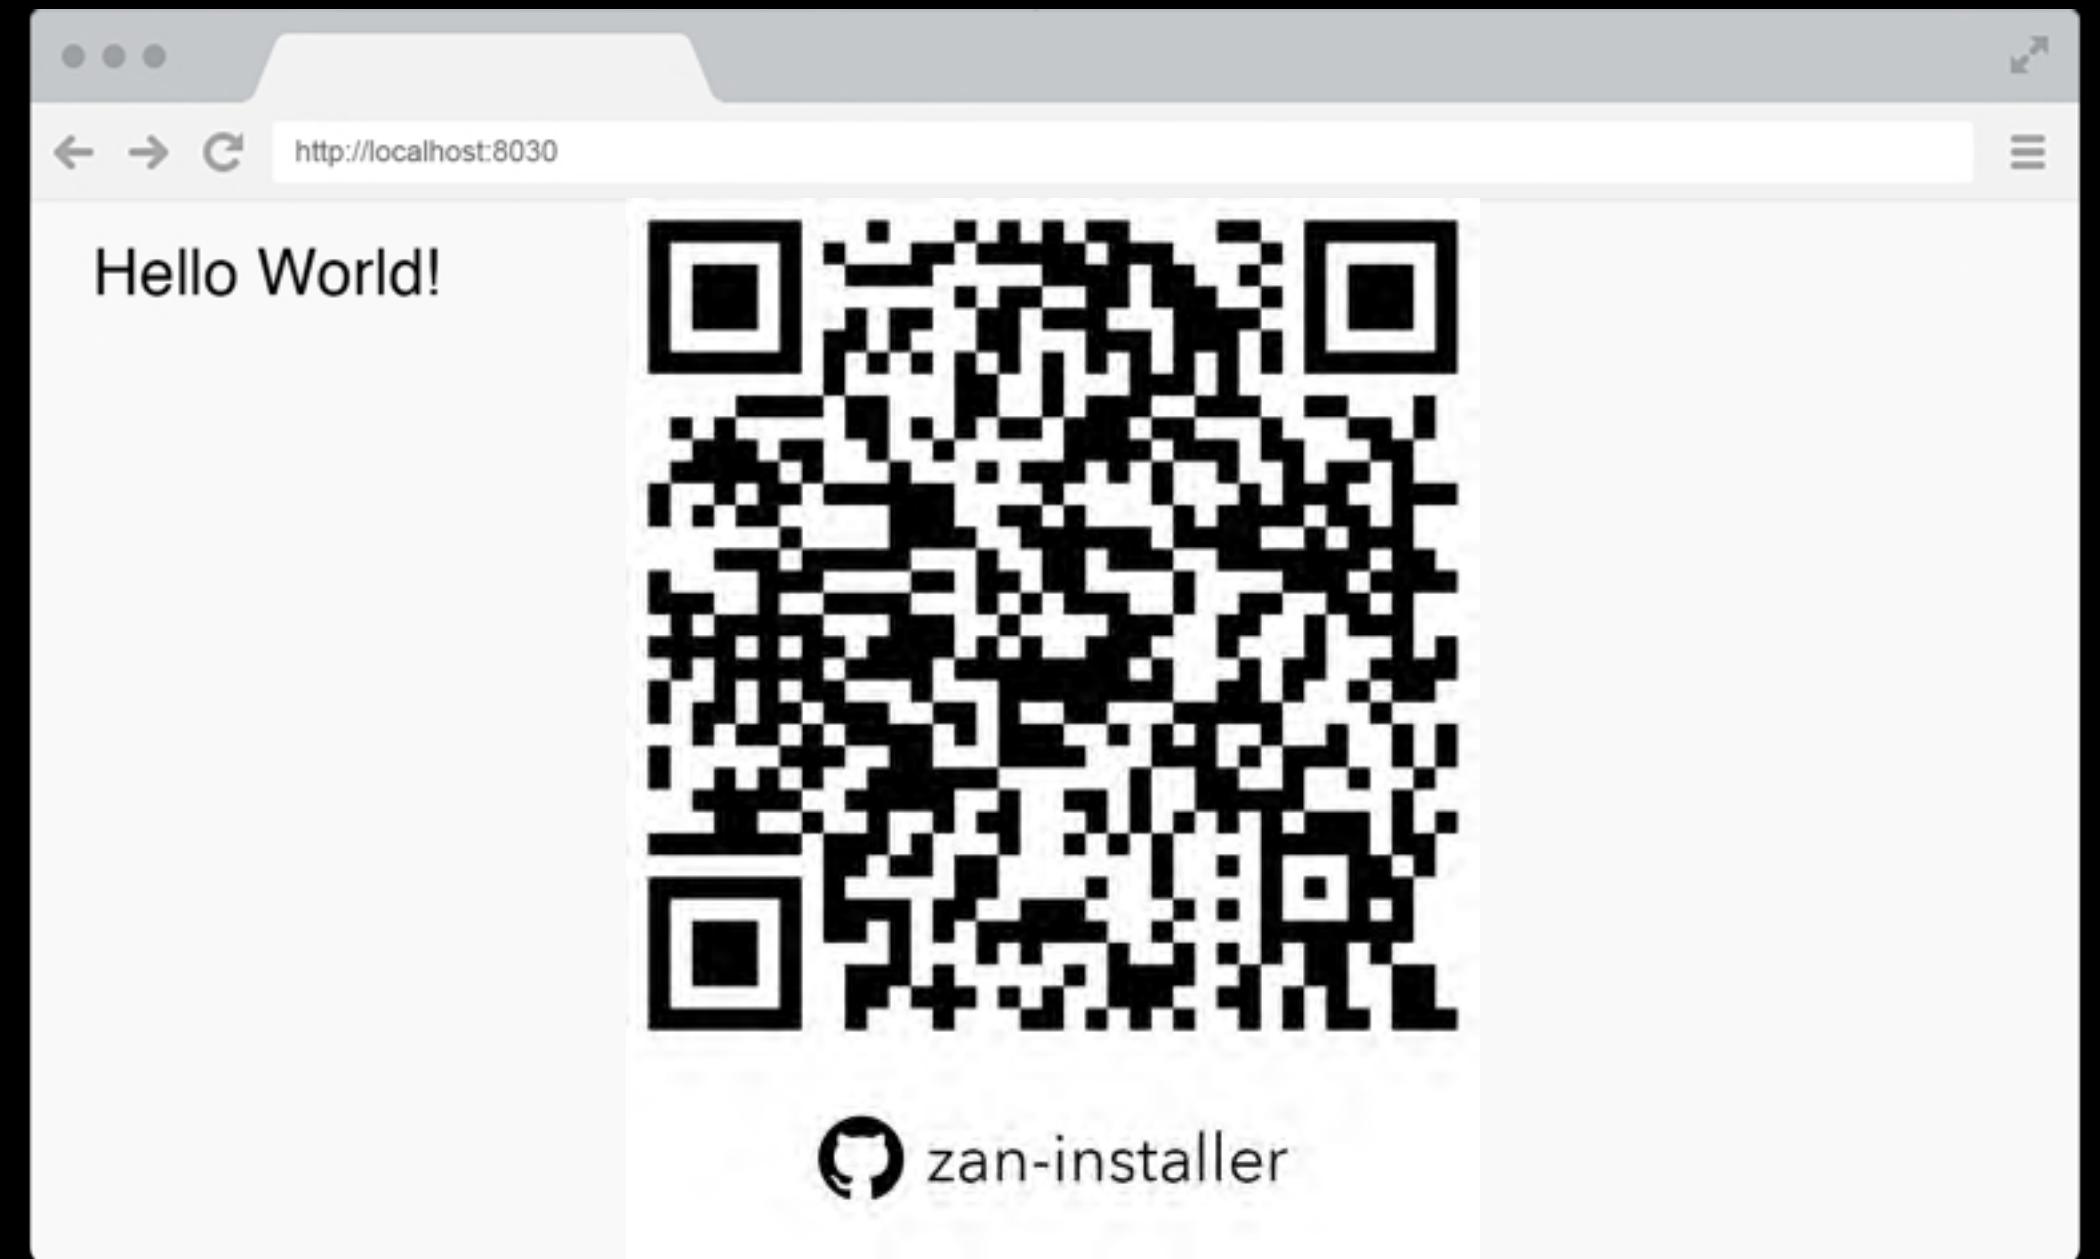



Part 2

协程 in Zan



Web IO模型

Web服务IO模型

PHP-FPM: 请求 — 进程

Java: 请求 — 线程

Golang: 请求 — 协程

Node.js: 请求 — Callback

Zan IO 模型:


Just like Golang

基于Swoole非阻塞Callback模式

With (PHP + yield)

实现了独立堆栈

简单的并行实现

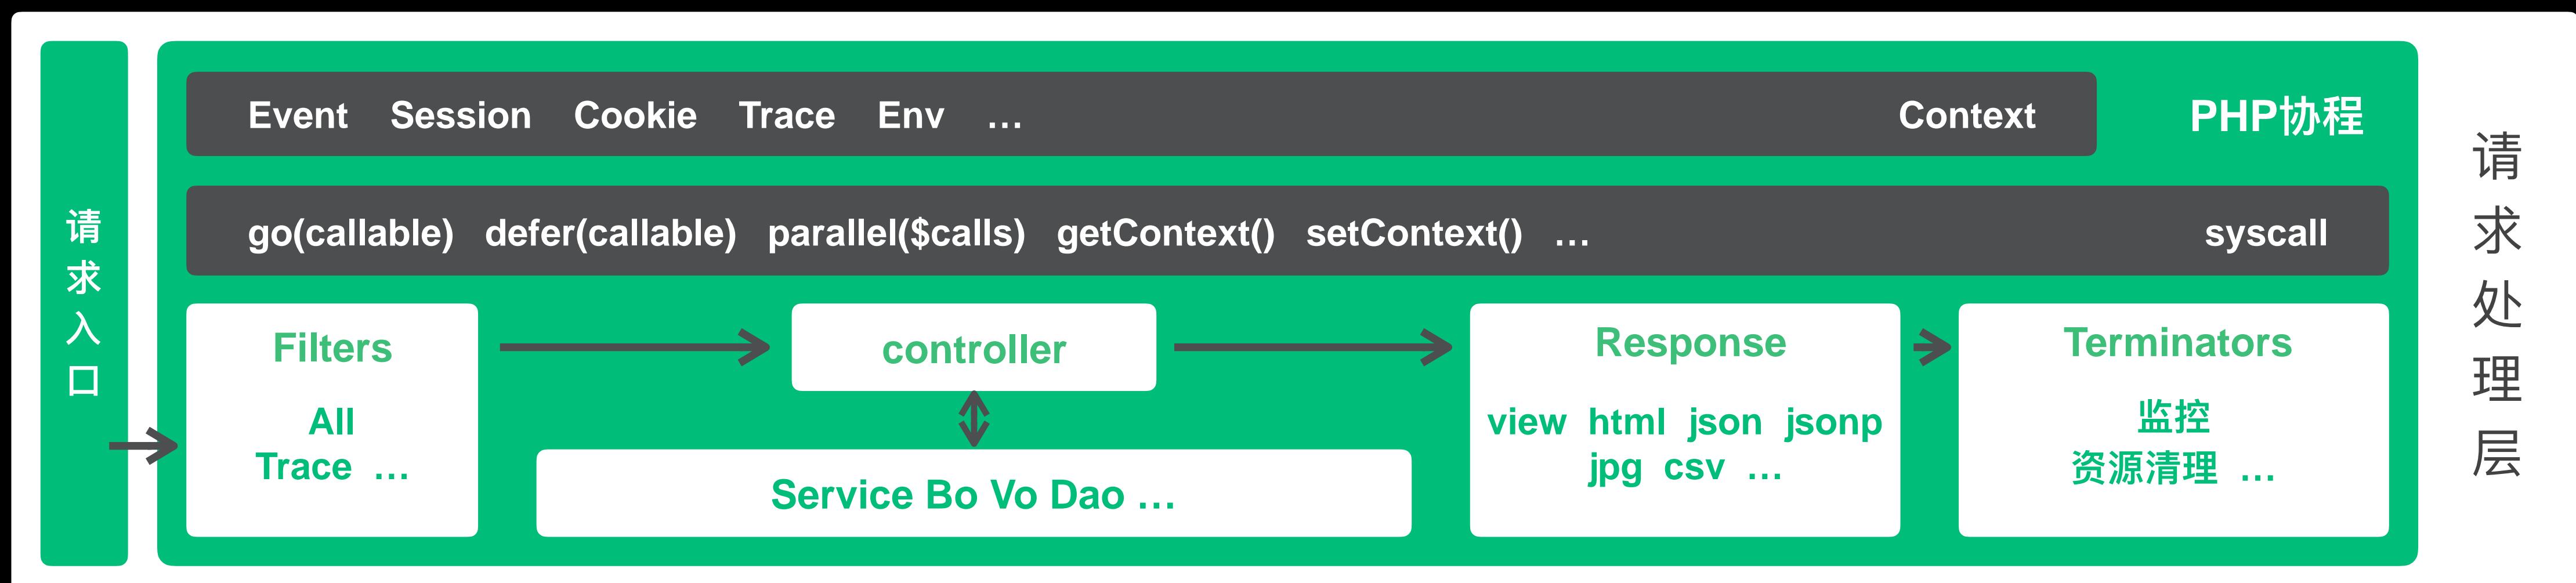



callback vs 协程

```
<?php

mysql_async_query1($param1, function($res1) {
    mysql_async_query2($res1, function($res2) {
        mysql_async_query3($res2, function($res3) {
            mysql_async_query4($res3, function($res4) {
                mysql_async_query5($res4, function($res5) {
                    mysql_async_query6($res5, function($res6) {
                        mysql_async_query7($res6, function($res7) {
                            //.....
                        });
                    });
                });
            });
        });
    });
});
```

```
<?php

$res1 = (yield mysql_async_query1($param1));
$res2 = (yield mysql_async_query2($res1));
$res3 = (yield mysql_async_query3($res2));
$res4 = (yield mysql_async_query4($res3));
$res5 = (yield mysql_async_query5($res4));
$res6 = (yield mysql_async_query6($res5));
$res7 = (yield mysql_async_query7($res6));
//....
```

我们不赞成用异步回调的方式去做功能开发，传统的PHP同步方式实现功能和逻辑是最简单的，也是最佳的方案。像node.js这样到处callback，只是牺牲可维护性和开发效率。



PHP协程


- yield关键字
- Generator
- 函数中断
- 双向通信

```
<?php
function gen() {
    $ret = (yield 'yield1');
    var_dump($ret);
}

$gen = gen();
var_dump($gen->current());      // string(6) "yield1"
var_dump($gen->send('ret1'))); // string(4) "ret1"  (the first var_dump in gen)
```



协程调度

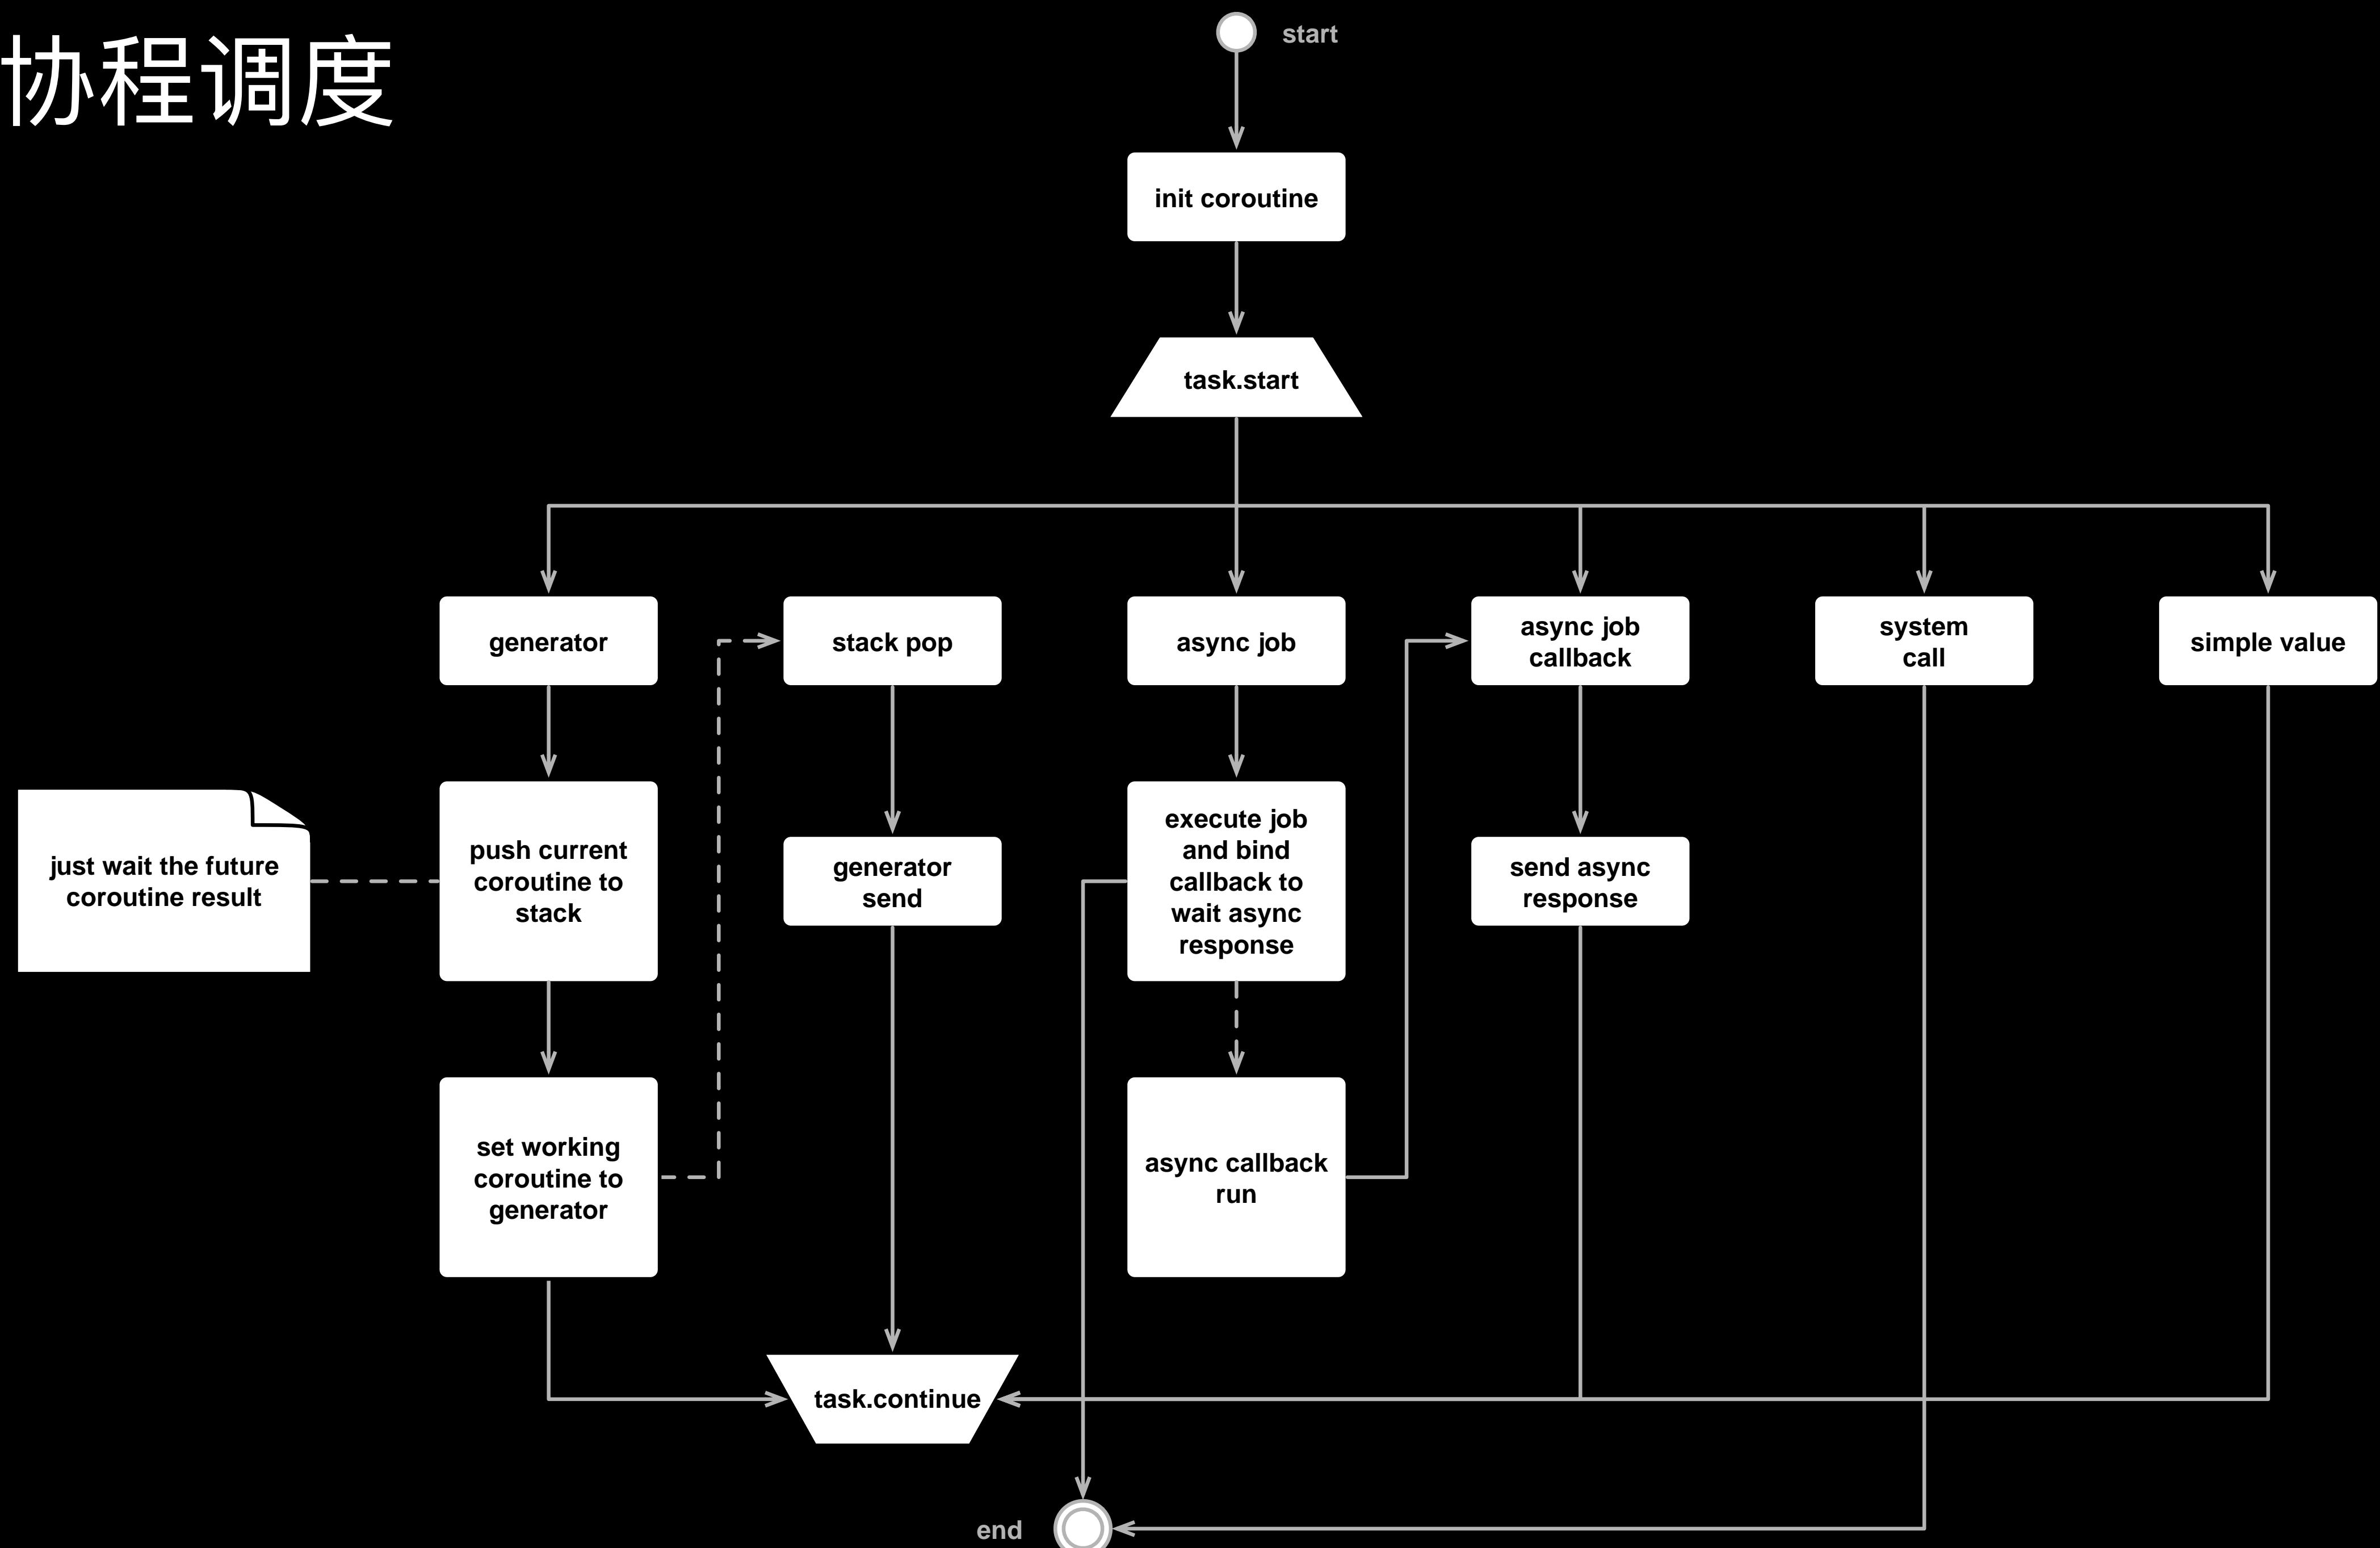



Syscall

- go(Generator \$coroutine)
- defer(callable \$cb)
- deferRelease(Resource \$res)
- parallel(\$coroutines)
- taskSleep(\$ms)
- ...



并行

```
public function run()
{
    $coroutines = [
        $this->firstCoroutine('aaa'),
        $this->secondCoroutine('bbb'),
        $this->getFunctionResult('ccc'),
        $this->sysCall()
    ];

    $value = (yield parallel($coroutines));
    var_dump($value);
}

private function firstCoroutine($value)
{
    yield taskSleep(10);
    yield $value;
}

private function secondCoroutine($value)
{
    yield taskSleep(20);
    yield $value;
}

private function getFunctionResult($thirdValue)
{
    yield taskSleep(30);
    return $thirdValue;
}

private function sysCall()
{
    yield taskSleep(40);
    yield getTaskId();
}
```

- 基于SysCall
- 轻量级的并行实现
- 业务开发无需关注内部实现



异常处理

- 全流程异常捕获
- 完美支持callback后的异常处理
- RPC异常透传

```
public function index()
{
    try {
        $res = (yield foo());
    } catch (Exception $e) {
        //handle exception
    }
}
```



单元测试支持

```
namespace Zan\Framework\Test\Testing;

use Zan\Framework\Testing\TaskTest;

class YieldTaskTest extends TaskTest {

    public function taskYield()
    {
        $a = (yield 1);

        $this->assertEquals(1, $a, 'Yield Task test failed');
    }

    public function taskYield1()
    {
        $a = (yield 1);

        $this->assertEquals(1, $a, 'Yield Task test failed');
    }

    public function taskYield2()
    {
        $a = (yield 1);

        $this->assertEquals(1, $a, 'Yield Task test failed');
    }
}
```

- 继承自 `UnitTest`
- 支持异步非阻塞
- `task` 前缀
- `case` 并行调用



Part 3

Zan框架设计




SqlMap

```
return [
    'row_by_id'=>[
        'require' => ['user_id'],
        'limit'   => □,
        'sql'      => 'SELECT * FROM users WHERE user_id=#{user_id}',
    ],
    'row_by_name_and_tag'=>[
        'require' => □,
        'limit'   => □,
        'sql'      => 'SELECT * FROM users
                        WHERE uname=#{uname}
                        AND tag_name= #{tag_name}
                        ORDER BY id desc',
    ],
];
```

- SQL定位
- Sharding
- Cache
- 建模驱动
- ...



View

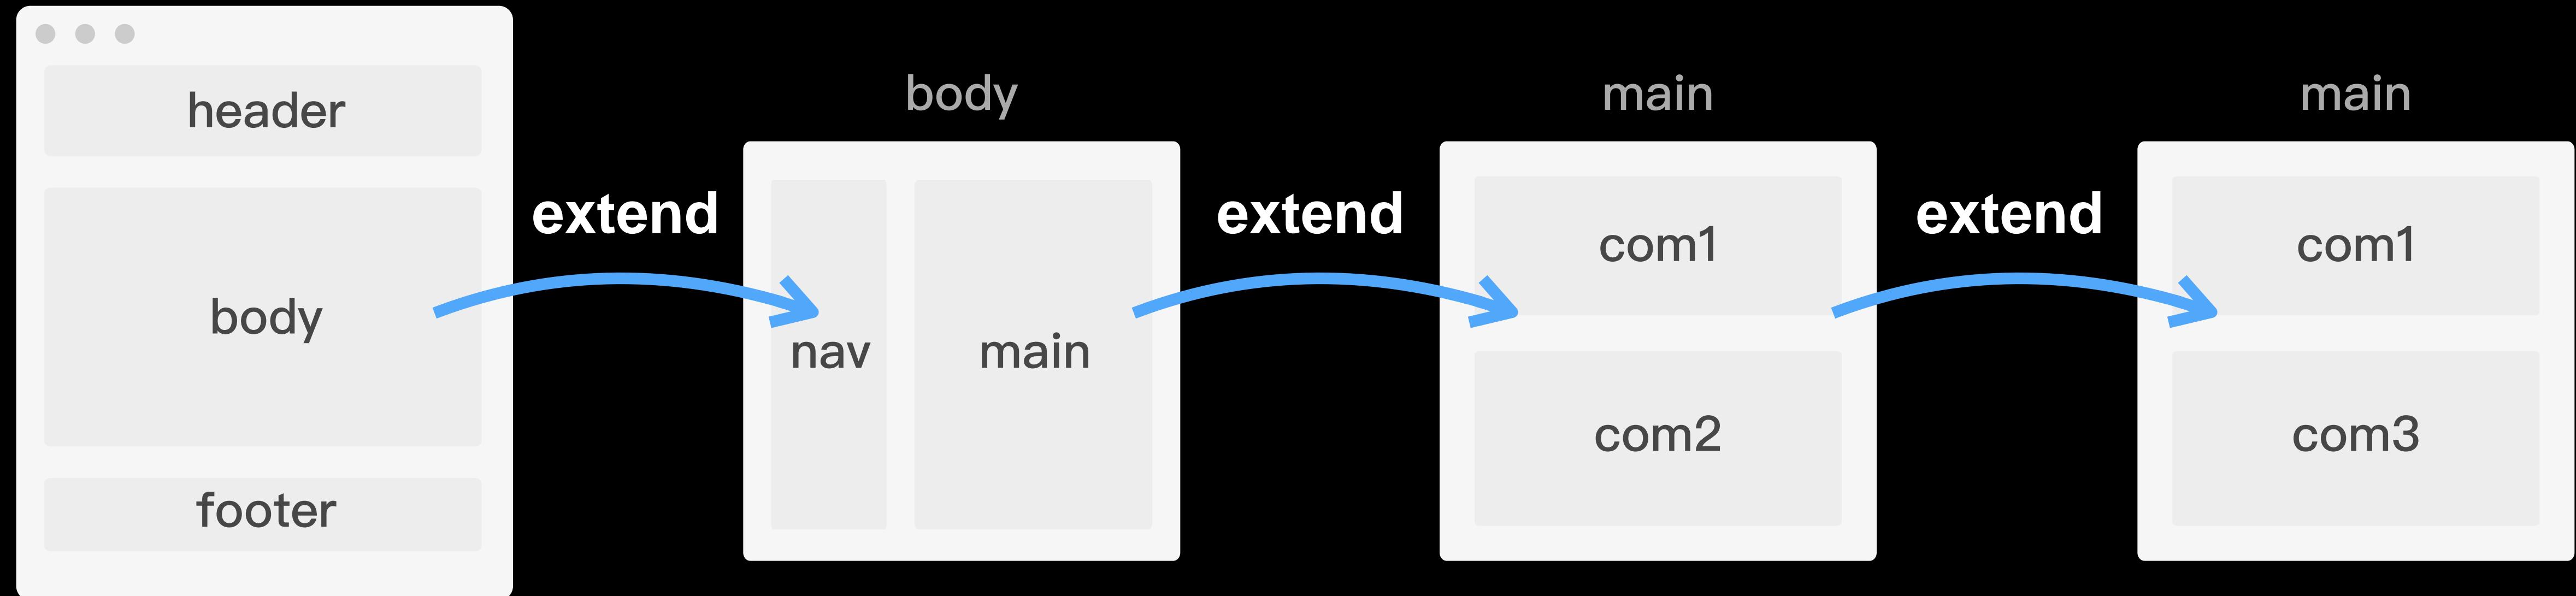

- 无限继承
- 组件化
- BigPipe & BigRender



连接池

2000 vs 2500000

I've used code very similar to the code above to produce ~3 million messages, and got an average throughput rate of 2000 messages/second. Removing the disconnect call, or increasing the batches to produce will change the rate at which messages get produced.

Not disconnecting at all yielded the best performance (by far): 2.5 million messages in just over 1 second (though depending on the output buffer, and how kafka is set up to handle full produce-queue's, this is not to be recommended!).

文字来源: <https://github.com/EVODelavega/phpkafka>



非阻塞Libs

- Mysql
- Redis
- KV
- TCP
- HTTP
- ...



SOA

Zan只是SOA路上的第一步...



压测数据

参数: c 300 n 1000000

机器: 32核 64G(受压机 * 1+压测机 * 1)

HttpServer	
场景	TPS
4次串行 -> TCP	14000
4次并行 -> TCP	20000
直接返回	60000

TcpServer	
场景	TPS
20ms延迟返回 2500并发	75000
直接返回	100000



谢谢



期待各路大神加入

chiyou@youzan.com

Zan: <http://github.com/youzan/zan>