


第二届

# 前端开发者年度大会

FEDAY



听过许多道理，  
却依然学不好前端。

一个前端的自我修养



面试官



React会么？

不会



那你还敢来面试？



老板



Angular用上  
了么？

不会



那你还敢提晋  
升？



产品经理



能用weex做么？

没……  
没听说过……



那你还敢叫前  
端？





hax



你知道闭包的历史么？你丫就敢问我？  
你知道JS之父当时怎么想的么？

闭……包？



面试官、老板、  
产品经理、社  
区技术大牛、  
whatever

不包治 + 前端

20%

80%

知识

能力

JavaScript语言  
DOM  
Device API  
CSSOM  
CSS  
HTML  
HTTP  
jQuery  
React  
.....

编程能力  
架构能力  
工程能力



# 知识学习

好前端才分对错，  
成年人只分利弊。



# 寻找线索

```
for(var p in window) console.log(
external
chrome
document
Pointman
KISSY
define
TB
TBC
g_config
T
goldlog
JSTracker2
tmsInit
_ERROR_LINKS_HTTPS_Num
ali_analytics
_ap
g_tb_aplus_loaded
g_aplus_pv_id
lib
goldminer
goldlog_queue
g_tb_aplus_launch
_img_0.29511889841075756
```

## 9. Full Grammar specification ¶

This is the full Python grammar, as it is read by the parser generator and used to parse Python source files:

```
# Grammar for Python

# Note: Changing the grammar specified in this file will most likely
# require corresponding changes in the parser module
# (./Modules/parsermodule.c). If you can't make the changes to
# that module yourself, please co-ordinate the required changes
# with someone who can; ask around on python-dev for help. Fred
# Drake <fdrake@acm.org> will probably be listening there.

# NOTE WELL: You should also follow all the steps listed in PEP 306,
# "How to Change Python's Grammar"

# Start symbols for the grammar:
# single_input is a single interactive statement;
# file_input is a module or sequence of commands read from an input file;
# eval_input is the input for the eval() and input() functions.
# NB: compound_stmt in single_input is followed by extra NEWLINE!
single_input: NEWLINE | simple_stmt | compound_stmt NEWLINE
file_input: (NEWLINE | stmt)* ENDMARKER
eval_input: testlist NEWLINE* ENDMARKER

decorator: '@' dotted_name [ '(' [arglist] ')' ] NEWLINE
decorators: decorator+
decorated: decorators (classdef | funcdef)
funcdef: 'def' NAME parameters ':' suite
parameters: '(' [vararglist] ')'
vararglist: ((fpdef ['=' test] ',' )*
             ('*' NAME ['=' '**' NAME] | '**' NAME) |
             fpdef ['=' test] ('*' fpdef ['=' test])* [, ','])
fpdef: NAME | '(' fplist ')'
fplist: fpdef (',' fpdef)* [, ',']

stmt: simple_stmt | compound_stmt
simple_stmt: small_stmt (';' small_stmt)* [';'] NEWLINE
small_stmt: (expr_stmt | print_stmt | del_stmt | pass_stmt | flow_stmt |
            import_stmt | global_stmt | exec_stmt | assert_stmt)
expr_stmt: testlist (augassign (yield_expr|testlist) |
                    '=' (yield_expr|testlist))*
augassign: ('+=' | '-=' | '*=' | '/=' | '%=' | '&=' | '|=' | '^=' |
            '<<=' | '>>=' | '&#x2192;=' | '//=')
```

- 附录
- 源代码
- 反射

# 建立联系

childNodes

parentNode

nextSibling

previousSibling

children

parentElement

nextElementSibling


previousElementSibling

- 美感
- 完备性
- 操作同一组数据

# 归类

```
Zepto.js (1.1.6)
Download
Browser support
Modules
Change Log
Acknowledgements

Core
$()
$.camelCase
$.contains
$.each
$.extend
$.fn
$.grep
$.inArray
$.isArray
$.isFunction
$.isPlainObject
$.isWindow
$.map
$.parseJSON
$.trim
$.type
add
addClass
after
append
appendTo
attr
children
clone
closest
concat
contents
css
```

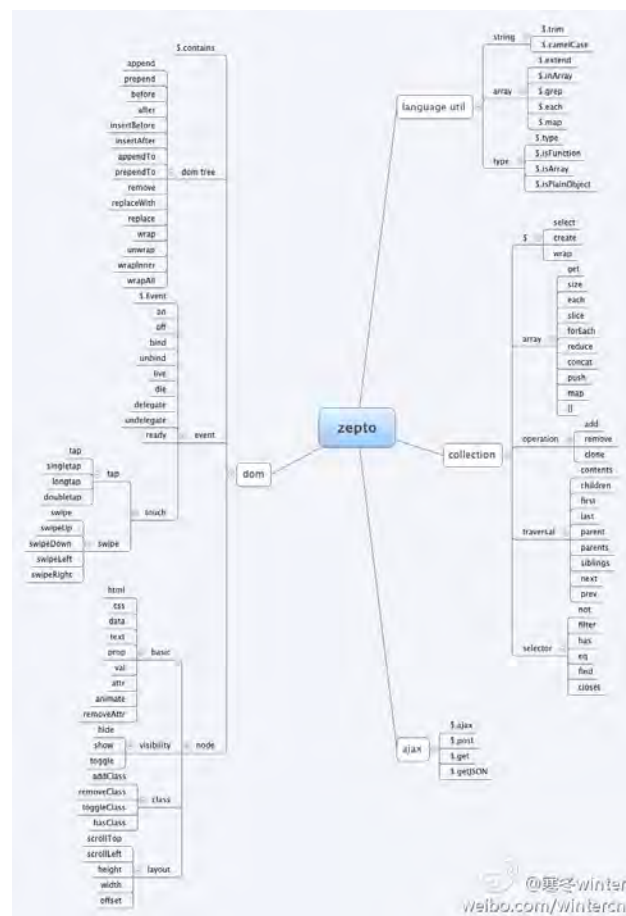

@寒冬winter  
weibo.com/wintercn





# 追本溯源


- 论文 (scholar search)
- 邮件列表讨论
- 代码提交记录

挑战

推翻

建立

新知识

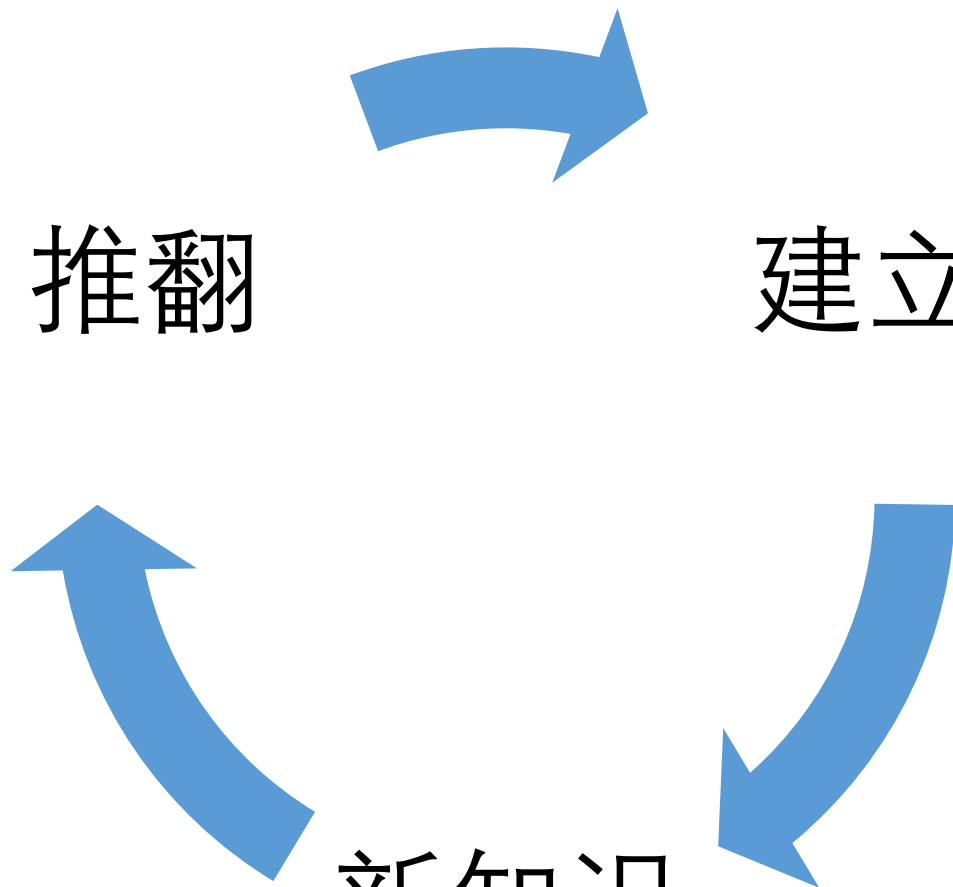


# 能力培养




它们都是你漫漫路上，  
只配错过的好工作。

# 教材

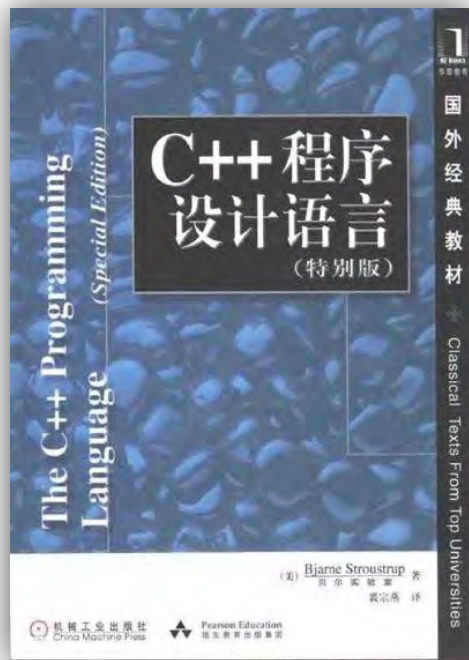

教材

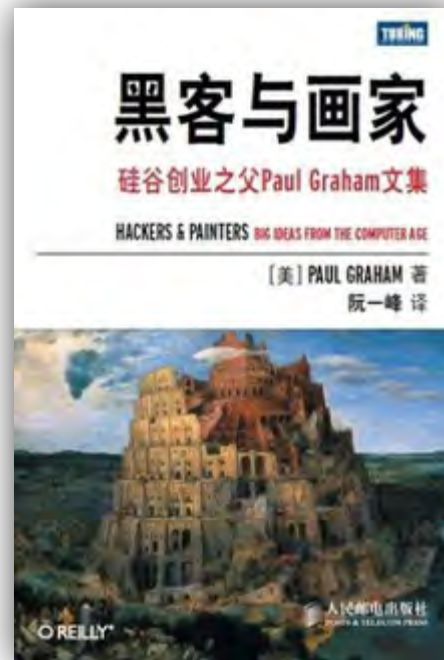

书

习题很重要。

习题很重要。

习题很重要。

# 训练

- 主动性
- 习惯养成
- 系统训练

# Q&A

@寒冬winter

taobaofed@alibaba-inc.com